


RUST-OLEUM®
INDUSTRIAL



HARD HAT® LINING AEROSOLS

Durable line marking paint

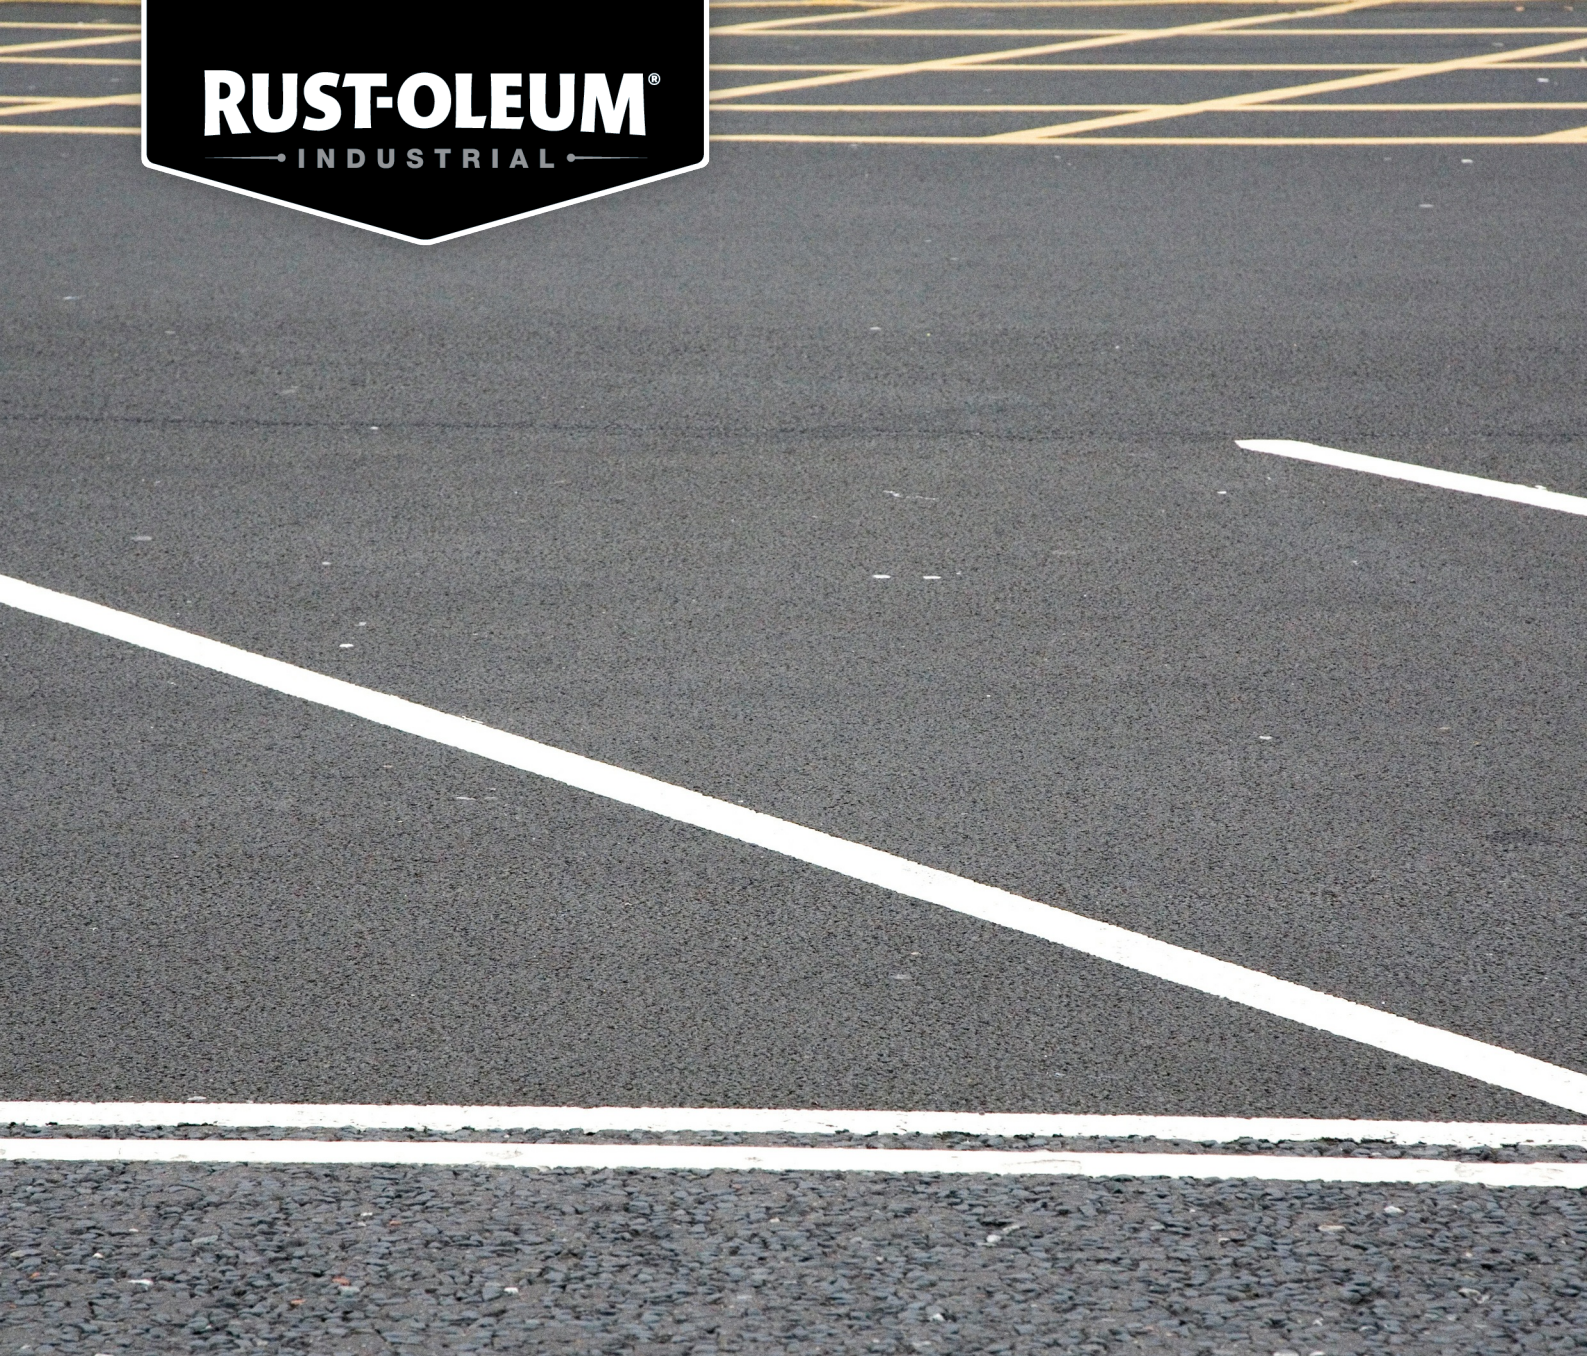

- For use with RUST-OLEUM® line applicators
- Adjustable line width from 5 to 10 cm
- Light traffic possible after just 4 hours
- Adheres to asphalt, concrete, grass, metal, wood, etc.
- Also available in 500 ml

KNOW-HOW TO PROTECT™

WWW.RUST-OLEUM.EU

HARD HAT® LINING AEROSOLS

BESKRIVELSE

Durable line marking paint, based on a fast drying short oil alkyd, for drawing lines in parking areas, plants, warehouses, sports fields, stadiums and all sites where traffic control is required.

ANBEFALT BRUK

RUST-OLEUM Lining Paint 2300 should be used in light traffic exposure. RUST-OLEUM Lining Paint 2300 is designed for use together with the Rust-Oleum Lining Machine. RUST-OLEUM Lining Paint 2300 is ideal for drawing lines in parking areas, plants, warehouses, sports fields, stadiums and all sites where traffic control is required.

TEKNISKE DATA

Glansgrad: Matt
Varmebestandig: 100°C (dry heat)

TØRKETID VED 20°C/50% RELATIV LUFTFUKTIGHET

Støvtørr: 20 minutes
Håndterbar: 4 hours
Overmalbar: Within 1 hour or after 48 hours

TEORETISK FORBRUK

Approx. 60 metres (500 ml) or 90 metres (750 ml) at a width of 10 cm.

PRAKTISK FORBRUK

Practical coverage depends on many factors such as porosity and roughness of the substrate and material losses during application.

KLARGJØRING AV OVERFLATE

Remove dirt, grease, oil and all other surface contaminants by appropriate means. The surface must be clean and dry during application.

PÅFØRINGSBETINGELSER

For good results the relative humidity shall be below 85% and the temperature of the can and substrate above 0°C.

PÅFØRING & FORTYNNING: AEROSOL

Remove cover cap. Shake vigorously for at least one minute after the rattle of mixing ball is heard. Turn can upside down and place into can-holder of the Rust-Oleum Lining Machine. See that spray head is properly placed into opening; the elongated part of the spray button should be parallel to the wheel axle. The can-holder is adjustable. When the holder is in its lowest position a line of approx. 5 cm wide can be drawn. When the holder is in the highest position the width of the line is approx. 10 cm. Intermediate widths can be obtained by varying the position of the holder. Pull trigger handle to activate the spraying. Striping machine should be moving whilst spraying to prevent inside build up of coating material. After use turn can upright and press spray button for 2 - 3 seconds to clean valve.

SIKKERHETSDATA

VOC nivå: 625 g/l
Merknader angående sikkerhet: Consult Safety Data Sheet and Safety Information printed on the can.

HOLDBARHET

Minimum of 3 years from date of production in unopened cans, if stored in dry, well ventilated areas, not in direct sunlight at temperatures between 5° and 35°C.

Utstedt dato: 07/02/2025

Tilgjengelige farger & størrelse på forpakninger: Vennligst referer til den respektive produktsiden på www.rust-oleum.eu for en oversikt over tilgjengelige farger og størrelse på forpakninger.

Ansvarsfraskrivelse: Så langt vi kjenner til er informasjonen i dette dokumentet korrekt og nøyaktig. Den er gitt i god tro, men uten garanti. Brukeren må selv avgjøre om våre produkter er egnet for hans/hennes bestemte formål. Ikke under noen omstendigheter skal Rust-Oleum Europe bli gjort ansvarlig for indirekte eller tilfældige skader. Produktene må lagres, håndteres og påføres under forhold som tilfredsstiller Rust-Oleum Europes anbefalinger som er detaljert beskrevet i den siste oppdaterte kopien av produktdatabladet. Brukerne er selv ansvarlige for at de har den siste oppdaterte kopien. De siste oppdaterte kopier av produktdatablad er tilgjengelig, og kan lastes ned gratis fra www.rust-oleum.eu, eller de kan fås ved forespørsel til vår kundeserviceavdeling. Rust-Oleum Europe forbeholder seg retten til å endre egenskapene til produktene sine uten forhåndsvarsel.

Rust-Oleum Netherlands B.V.
Zilverenberg 16
5234 GM 's-Hertogenbosch
The Netherlands
T : +31 (0) 165 593 636
F : +31 (0) 165 593 600
info@rust-oleum.eu

Tor Coatings Ltd (Rust-Oleum Industrial)
Shadon Way, Portobello Ind. Estate
Birtley, Chester-le-Street
DH3 2RE United Kingdom
T : +44 (0)1914 113 146
F : +44 (0)1914 113 147
info@rust-oleum.eu

Rust-Oleum France S.A.S.
38, av. du Gros Chêne
95322 Herblay
France
T : +33(0) 130 40 00 44
F : +33(0) 130 40 99 80
info@rust-oleum.eu

N.V. Martin Mathys S.A.
Kolenbergstraat 23
3545 Zelem
Belgium
T : +32 (0) 13 460 200
F : +32 (0) 13 460 201
info@rust-oleum.eu