


**RUST-OLEUM®**  
INDUSTRIAL



## HARD HAT® STAIN BLOCKER

# The effective solution to stains

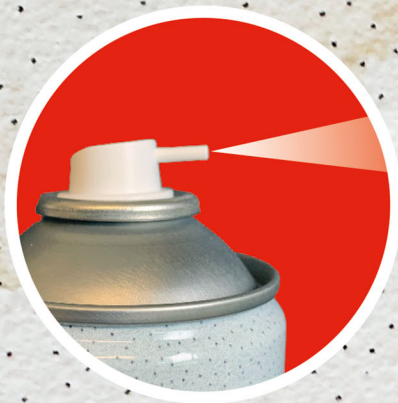

- Matt white finish, best possible opacity (Non-yellowing)
- Touch dry (in 5-10 minutes), Tack-free time: 10 min
- Overcoat time: 30 min
- For application on concrete, plaster, particle board existing coatings, wall paper etc.
- Odourless. Recoatable with standard wall paints

KNOW-HOW TO PROTECT™

WWW.RUST-OLEUM.EU

# HARD HAT® STAIN BLOCKER

## BESKRIVELSE

RUST-OLEUM® HARD HAT Aerosol 2990 Stainblocker is a matt white high-pigmented coating based on a plasticized acrylic resin for the permanent isolation of problem stains from nicotine, soot, tar and rust and the effects of moisture, graffiti and a numerous other colourings.

## ANBEFALT BRUK

RUST-OLEUM® HARD HAT Aerosol 2990 Stainblocker is a renovation paint which can be applied directly on ceilings, plaster, cement, wood, concrete, wallpaper, isolation walls, old paints, etc. RUST-OLEUM® HARD HAT Aerosol 2990 Stainblocker can be used as topcoat or can be recoated with standard wall paints.

## TØRKETID VED 20°C/50% RELATIV LUFTFUKTIGHET

Støvtørr:	5 minutes
Overmalbar:	Wet in wet / after ½ hour
Herdetid:	24 hours

## TEORETISK FORBRUK

2,1 m<sup>2</sup> per aerosol at 30 µm dry

## PRAKTISK FORBRUK

Practical coverage depends on many factors such as roughness of the substrate and material losses during application.

## KLARGJØRING AV OVERFLATE

Remove dirt, grease, oil, loose rust and all other surface contaminants by appropriate means. Sand intact coatings to roughen the surface slightly. The surface must be clean and dry during application.

## PÅFØRINGSBETINGELSER

For optimum results the relative humidity should be below 85% and the temperature of the can above 0°C.

## PÅFØRING & FORTYNNING: AEROSOL

Remove cover cap. Shake vigorously for at least one minute after the rattle of mixing ball is heard. Shake frequently during use. Hold can approx. 25 cm from surface. Use back and forth motion keeping can parallel with surface. Ensure that can is in motion when spray button is pressed to avoid runs and sags. Apply several thin layers at a few minutes interval to achieve adequate coating thickness. After use turn can upside down and press spray button for 2 - 3 seconds to clean valve.

## SIKKERHETSDATA

VOC nivå:	538 g/l
Merknader angående sikkerhet:	Consult Safety Data Sheet and Safety Information printed on the can.

## HOLDBARHET

Minimum of 3 years from date of production, if stored in dry, well ventilated areas, not in direct sunlight at temperatures between 5° and 35° C.

Utstedt dato: 31/10/2024

**Tilgjengelige farger & størrelse på forpakninger:** Vennligst referer til den respektive produktsiden på [www.rust-oleum.eu](http://www.rust-oleum.eu) for en oversikt over tilgjengelige farger og størrelse på forpakninger.

**Ansvarsfraskrivelse:** Så langt vi kjenner til er informasjonen i dette dokumentet korrekt og nøyaktig. Den er gitt i god tro, men uten garanti. Brukeren må selv avgjøre om våre produkter er egnet for hans/hennes bestemte formål. Ikke under noen omstendigheter skal Rust-Oleum Europe bli gjort ansvarlig for indirekte eller tilfældige skader. Produktene må lagres, håndteres og påføres under forhold som tilfredsstiller Rust-Oleum Europes anbefalinger som er detaljert beskrevet i den siste oppdaterte kopien av produktdatabladet. Brukerne er selv ansvarlige for at de har den siste oppdaterte kopien. De siste oppdaterte kopier av produktdatabladet er tilgjengelig, og kan lastes ned gratis fra [www.rust-oleum.eu](http://www.rust-oleum.eu), eller de kan fås ved forespørsel til vår kundeserviceavdeling. Rust-Oleum Europe forbeholder seg retten til å endre egenskapene til produktene sine uten forhåndsvarsel.

**Rust-Oleum Netherlands B.V.**  
Zilverenberg 16  
5234 GM 's-Hertogenbosch  
The Netherlands  
T: +31 (0) 165 593 636  
F: +31 (0) 165 593 600  
[info@rust-oleum.eu](mailto:info@rust-oleum.eu)

**Tor Coatings Ltd (Rust-Oleum Industrial)**  
Shadon Way, Portobello Ind. Estate  
Birtley, Chester-le-Street  
DH3 2RE United Kingdom  
T: +44 (0)1914 113 146  
F: +44 (0)1914 113 147  
[info@rust-oleum.eu](mailto:info@rust-oleum.eu)

**Rust-Oleum France S.A.S.**  
38, av. du Gros Chêne  
95322 Herblay  
France  
T: +33(0) 130 40 00 44  
F: +33(0) 130 40 99 80  
[info@rust-oleum.eu](mailto:info@rust-oleum.eu)

**N.V. Martin Mathys S.A.**  
Kolenbergstraat 23  
3545 Zelem  
Belgium  
T: +32 (0) 13 460 200  
F: +32 (0) 13 460 201  
[info@rust-oleum.eu](mailto:info@rust-oleum.eu)