


**RUST-OLEUM®**  
INDUSTRIAL

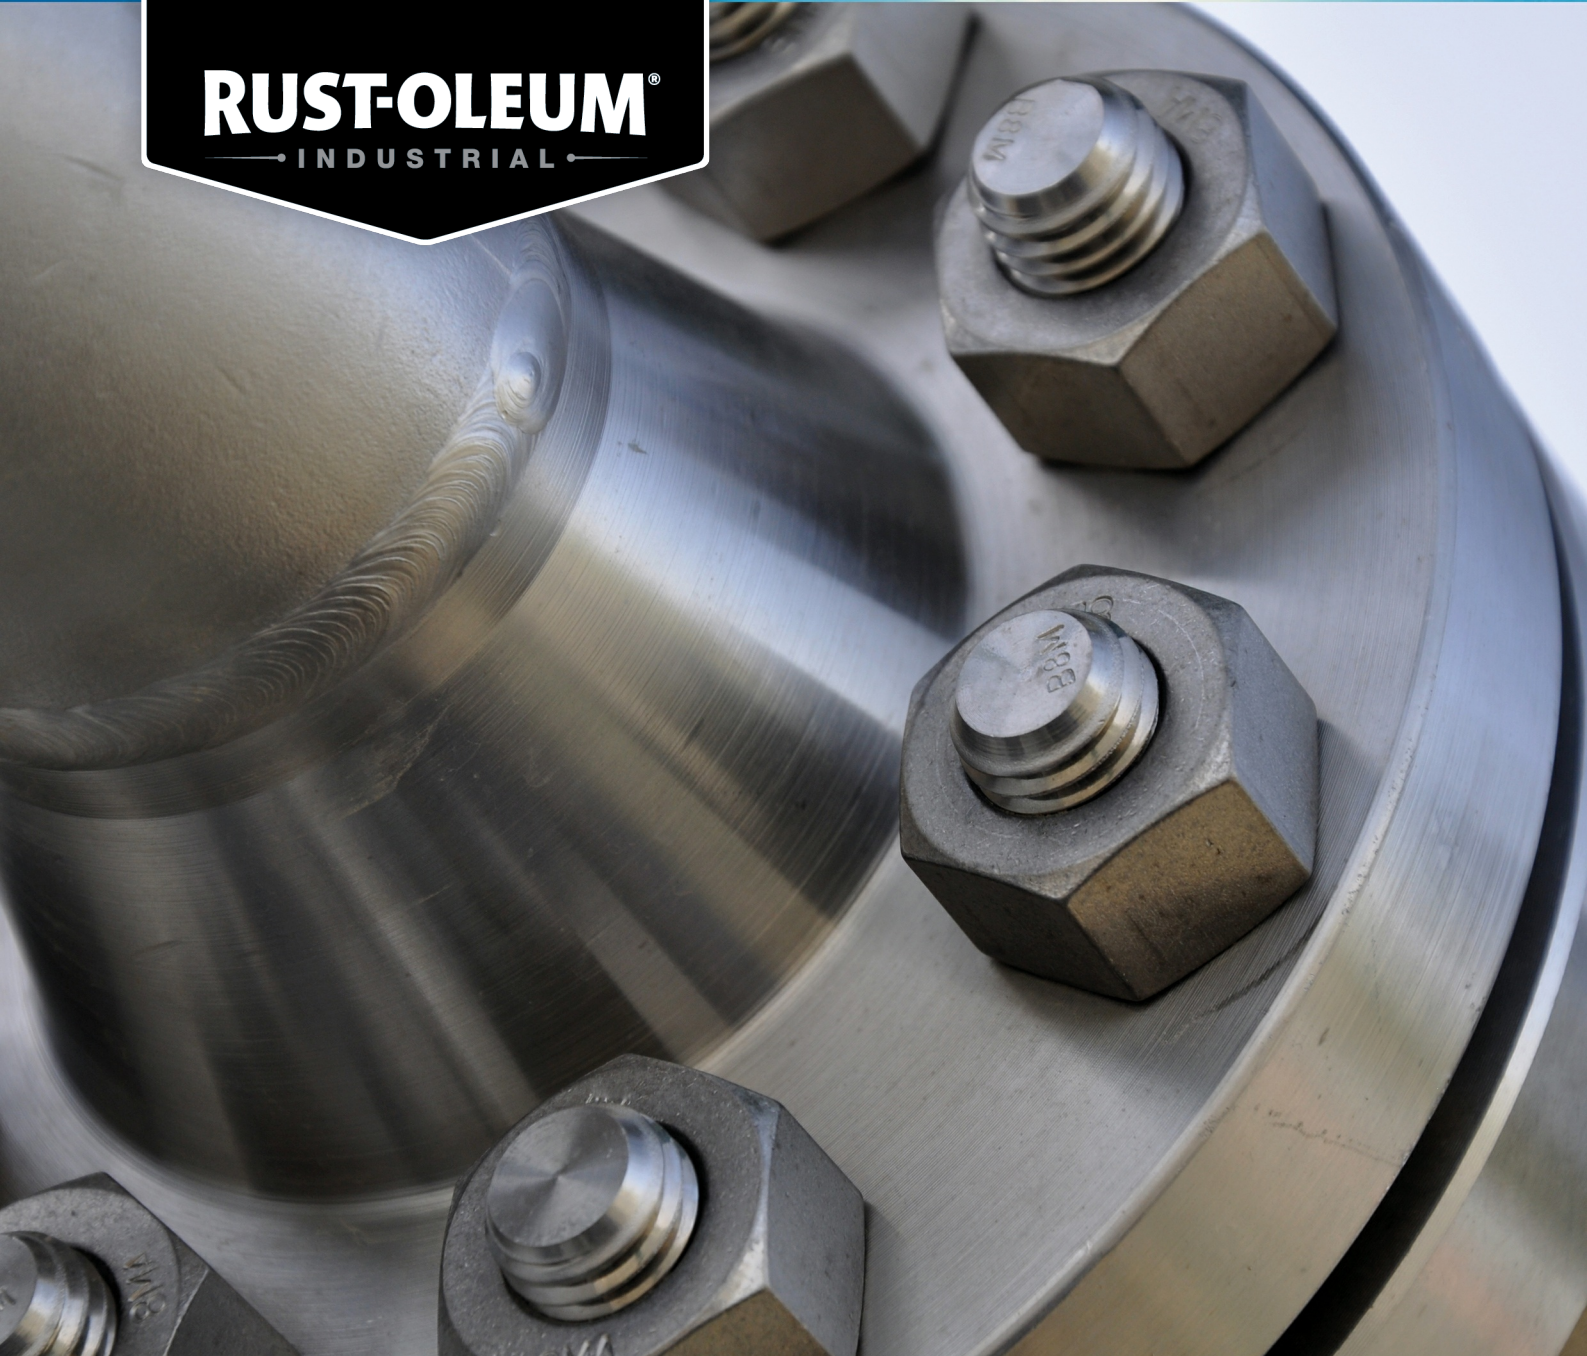

## HARD HAT® TOPCOAT TRANSPARENT

# Transparent topcoat for protection and durability

- Non-yellowing (UV resistant)
- Quick drying (10-15 min.)
- Protective layer for many metal surfaces
- Gloss repair of old coatings
- Provides extra durability to metallic and fluorescent coatings

footer\_main\_page\_line\_one

footer\_main\_page\_line\_two

# HARD HAT® TOPCOAT TRANSPARENT

## POPIS PRODUKTU (DLHÝ)

Hard Hat® Aerosols Transparent Topcoat 2500 is a non-yellowing coating, based on fast drying acrylic resin.

## ODPORÚČANÉ POUŽITIE

RUST-OLEUM Transparent Topcoat 2500 should be applied over RUST-OLEUM Hard Hat Fluorescent Topcoats 2200 or Metallic Topcoats 2100 or can be used to restore the gloss of faded old coatings. RUST-OLEUM Transparent Topcoat 2500 can be applied direct on several metals like: aluminium, brass, bronze, chrome and copper. RUST-OLEUM Transparent Topcoat 2500 is intended for small maintenance jobs or for touch-up. RUST-OLEUM Transparent Topcoat 2500 should be used in light industrial exposures, normal humidity and interior applications.

## TECHNICAL\_DATA

Úroveň lesku: Gloss  
Tepelná odolnosť: 100°C (dry heat)

## DRY\_TIMES\_BY\_20

Na dotyk suché: 15 minutes  
Suché na manipuláciu: 30 minutes  
Suchý na opätovné natieranie: After 1 hour  
Úplne vytvrdnuté: 3 days

## ODPORÚČANÁ HRúbKA MOKRÉHO FILMU

60 µm

## ODPORÚČANÁ HRúbKA SUCHÉHO FILMU

15 µm

## TEORETICKÁ SPOTREBA

3.5 m<sup>2</sup> per spray can at 15 µm dry

## PRAKTICKÁ VÝDATNOSŤ

Practical coverage depends on many factors such as porosity and roughness of the substrate and material losses during application.

## PRÍPRAVA POVRCHU

Remove dirt, grease, oil and all other surface contaminants by appropriate means. Sand intact coatings to roughen the surface slightly. The surface must be clean and dry during application.

## PODMIENKY APLIKÁCIE

For good results the relative humidity shall be below 85% and the temperature of the can and substrate above 0°C.

## APLIKÁCIA A RIEDENIE: AEROSÓL

Remove cover cap. Shake vigorously for at least one minute after the rattle of mixing ball is heard. Shake frequently during use. Hold can approx. 25 cm from surface. Use back and forth motion keeping can parallel with surface. Ensure that can is in motion when spray button is pressed to avoid runs and sags. Apply several thin layers at a few minutes interval to achieve adequate coating thickness. After use turn can upside down and press spray button for 2 - 3 seconds to clean valve.

## DATA\_SAFETY\_DATA

Úroveň VOC: 651 g/l  
Poznámky k bezpečnosti: Consult Safety Data Sheet and Safety Information printed on the can.

## SKLADOVATEĽNOSŤ

Minimum of 5 years from date of production in unopened cans, if stored in dry, well ventilated areas, not in direct sunlight at temperatures between 5° and 35°C.

last\_updated: 07/02/2025

footer\_data\_colors\_pack\_sizes: footer\_data\_colors\_pack\_sizes.value

footer\_data\_disclaimer: footer\_data\_disclaimer.value

**Rust-Oleum Netherlands B.V.**  
Zilverenberg 16  
5234 GM 's-Hertogenbosch  
The Netherlands  
T : +31 (0) 165 593 636  
F : +31 (0) 165 593 600  
info@rust-oleum.eu

**Tor Coatings Ltd (Rust-Oleum Industrial)**  
Shadon Way, Portobello Ind. Estate  
Birtley, Chester-le-Street  
DH3 2RE United Kingdom  
T : +44 (0)1914 113 146  
F : +44 (0)1914 113 147  
info@rust-oleum.eu

**Rust-Oleum France S.A.S.**  
38, av. du Gros Chêne  
95322 Herblay  
France  
T : +33(0) 130 40 00 44  
F : +33(0) 130 40 99 80  
info@rust-oleum.eu

**N.V. Martin Mathys S.A.**  
Kolenbergstraat 23  
3545 Zelem  
Belgium  
T : +32 (0) 13 460 200  
F : +32 (0) 13 460 201  
info@rust-oleum.eu